


Zoom series



IP20  
TECHNICAL DRAWINGS

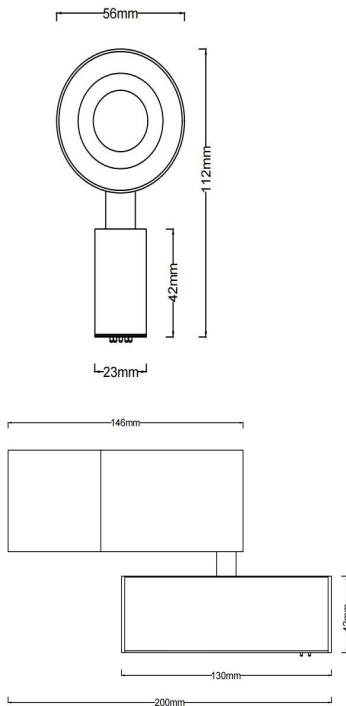

BRAND

LUXURY LED LIGHTING

DESCRIPTION

Beam angle adjustable, from 20D to 60D  
 Junction arm integrated in the spotlight's body to keep the barycentre aligned with the track and prevent any imbalance in possible suspension versions of track and prevent any imbalance in possible suspension versions of the track. The junction allows 360° rotation  
 External dimming interface with Triac, 0/1-10V, Dali

FEATURES

Article Code: Zoom series  
 Color: Black/White  
 Installation: Magnetic  
 Environment: Indoor with zoom & focus lens

GENERAL SPECIFICATION

CCT: 2700K/3000K/4000K  
 CRI: RA90  
 LED: Cree  
 DIM: Triac, 0/1-10V, Dali

AVAILABLE MODELS

| Item               | Power(w) | Size(mm) | Beam angle | Lumen(lm) |
|--------------------|----------|----------|------------|-----------|
| MT-SPOTANG-B-3 10W |          | Ø56*146  | 20D-60D    | 805Lm     |
| MT-SPOTANG-B-4 10W |          | Ø56*146  | 20D-60D    | 805Lm     |

PACKAGE INFORMATION

| Item       | Qty/Ctn(pcs) | N.W/Ctn(kgs) | G.W/Ctn(kgs) | L*W*H(cm) |
|------------|--------------|--------------|--------------|-----------|
| MT-SPOTANG | 18           | 9            | 12.7         | 50*52*23  |

TECHNICAL DRAWINGS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

